


## 15-Light & 25-Light Display Modes

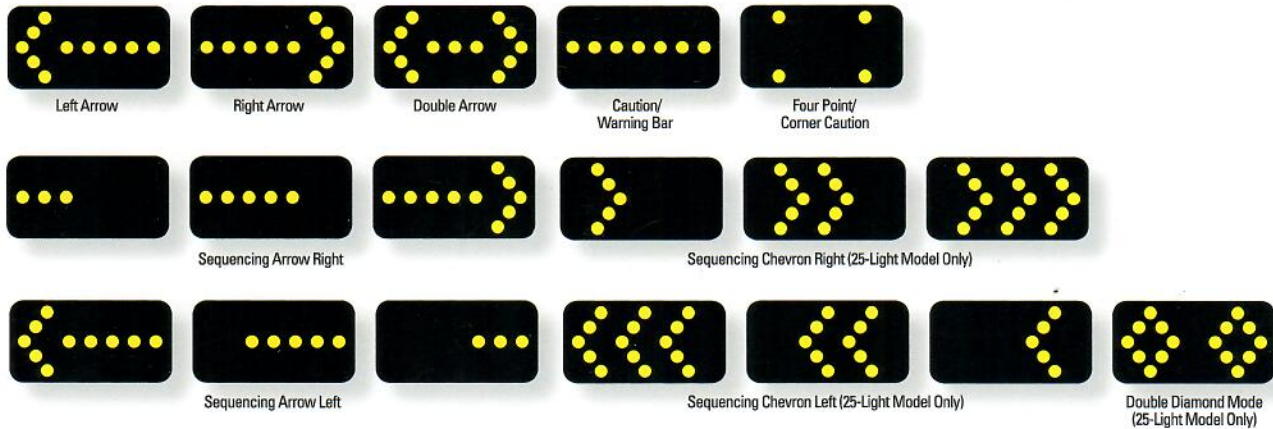

The solar panel is positioned for maximum charging capabilities in both the operating and travel modes.

The solid-state controller incorporates Auto-Trac, an automatic, full-time tracking system that adjusts the lamp intensity to the ambient light conditions. The controller is located in an easy-to-access lockable location inside the back of the sign case with the batteries securely enclosed and hidden inside the trailer deck.

The 5", amber, PAR 46, LED lamp is a sophisticated, high-output, low-power-consumption, sealed-beam lamp with a life that is unparalleled by other conventional arrow board lamps. The lamp is backed by a five-year warranty.



Optically enhanced LED Lamps



### 15-LIGHT ARROWMASTERTM PRO-LINE UNIT

Model No.	Description
WAAW-PL15C	Arrowmaster Pro-Line w/Onboard AC Charger, Standard Angularity

### 25-LIGHT ARROWMASTERTM PRO-LINE UNIT

Model No.	Description
WAAW-PL25C	Arrowmaster Pro-Line w/Onboard AC Charger, Standard Angularity

### OPTIONS

Model No.	Description
WAAW-PL-HP	Rear Ball Hitch Plate
WAAW-PL-BC	2-in Bulldog Coupler
WAAW-2131	3-in Pintle Ring Hitch
WAAW-PL-CH	Combination Hitch

### SPECIFICATIONS

	15-Light	25-Light
Shipping Weight	850 lbs	880 lbs
Tongue Weight (Panel Down)	75 lbs	75 lbs
Tongue Weight (Panel Up)	75 lbs	75 lbs
Length with Tongue	116"	116"
Width	68"	68"
Traveling Height	93"	93"
Operation Height	142"	142"
Sign Panel Size	48"H x 96"W	48"H x 96"W
Number of Batteries	4	4
Battery Type	12V 18AH wired in parallel	12V 18AH wired in parallel



### HILL & SMITH INC.

987 Buckeye Park Road | Columbus OH 43207

(614) 340-6294 | [info@hillandsmith.com](mailto:info@hillandsmith.com)

[www.hillandsmith.com](http://www.hillandsmith.com) | [www.workareaprotection.com](http://www.workareaprotection.com)